


AD13525 ES SERIES

Preliminary

External Dimensions

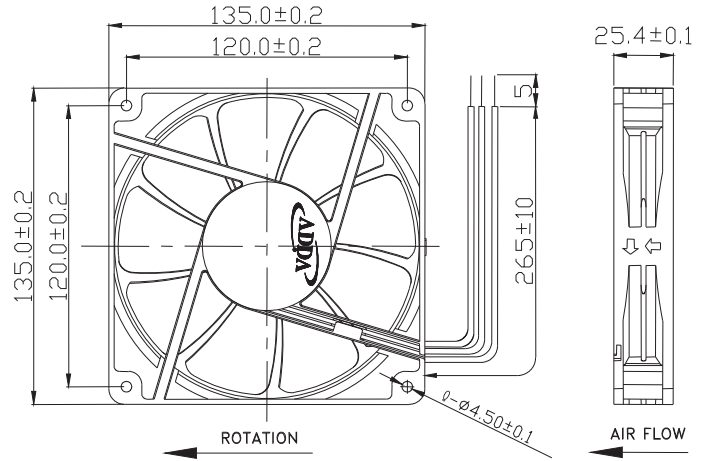

Frame:Plastic(UL:94V-0)
Impeller:Plastic(UL:94V-0)
Lead wire:UL 1007AWG24


Specifications(Nominal)

*:Noise is measured at the distance of one (1) meter from the axis of intake.

Bearing type: ◎=Ball ※=Sleeve ○=1B1S ●=Hypro bearing

Frame size (mm)	Model No.	Bearing System Type	Rated Voltage (VDC)	Current (A)	Power (W)	Rated Speed (rpm)	Maximum AirFlow		Maximum Pressure		*Noise Level (dB/A)	Weight (g)
135x135x25	AD13512DB259000	◎	12	0.08	0.96	1500	1.849	65.337	0.080	2.032	28.5	220.0
	AD13512LB259000	◎	12	0.12	1.44	1800	2.205	77.949	0.107	2.717	33.6	
	AD13512MB259000	◎	12	0.16	1.92	2050	2.551	90.149	0.138	3.505	37.8	
	AD13512HB259000	◎	12	0.21	2.52	2200	2.699	95.373	0.190	4.826	39.0	
	AD13512UB259000	◎	12	0.29	3.48	2500	3.074	108.629	0.233	5.918	42.5	

Specifications subject to change without notice.

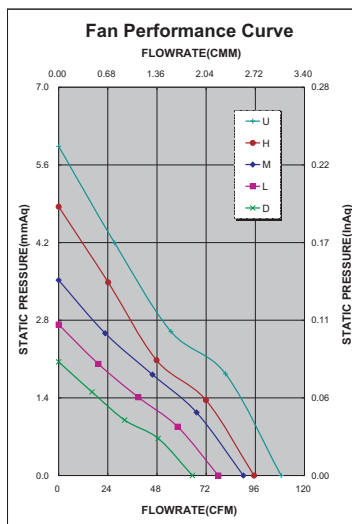

*Motor protective circuit and third lead wire functions

0	1	2	3	4	6	7	8	9	A	B
✓					✓					

*Safety approvals

				
				✓