


AD5020-5 SERIES



External Dimensions

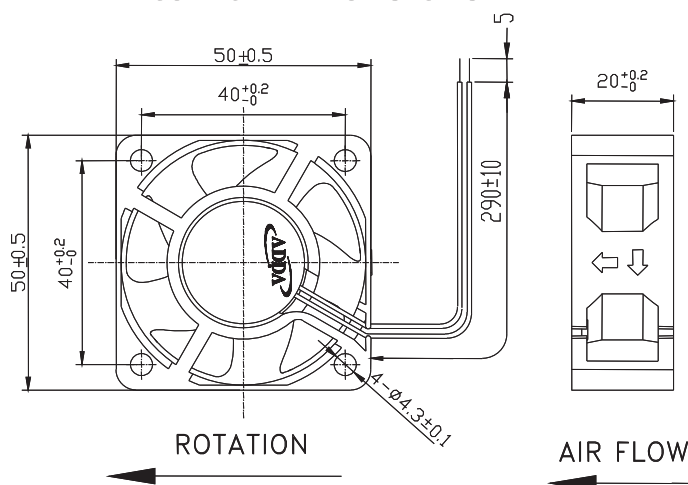

Frame: Plastic (UL: 94V-0)
Impeller: Plastic (UL: 94V-0)
Lead wire: UL 1007 AWG26


Specifications(Nominal)

*: Noise is measured at the distance of one (1) meter from the axis of intake.

Bearing type: ◎=Ball ※=Sleeve ○=1B1S ●=Hypro bearing

Frame size (mm)	Model No.	Bearing System Type	Rated Voltage (VDC)	Current (A)	Power (W)	Rated Speed (rpm)	Maximum AirFlow (CMM) (CFM)	Maximum Pressure (InAq) (mmAq)	*Noise Level (dB/A)	Weight (g)
50x50x20	AD5012UB-C50(T)	◎ ●	12	0.19	2.22	6300	0.492 17.40	0.260 6.50	37.5	43.0

Specifications subject to change without notice.

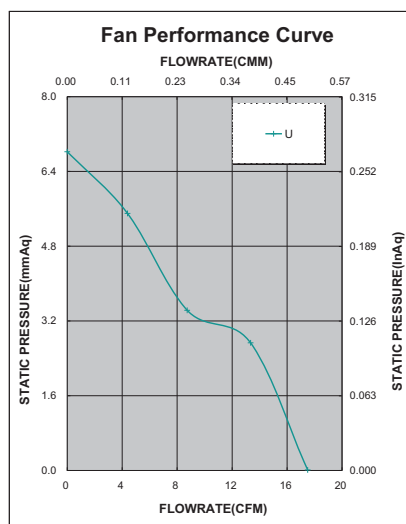

*Motor protective circuit and third lead wire functions

0	1	2	3	4	6	7	8	9	A	B
✓					✓					

*Safety approvals

UL	cUL	SP®	RoHS	CE
✓	✓		✓	✓