


AD6010(11) SERIES

External Dimensions

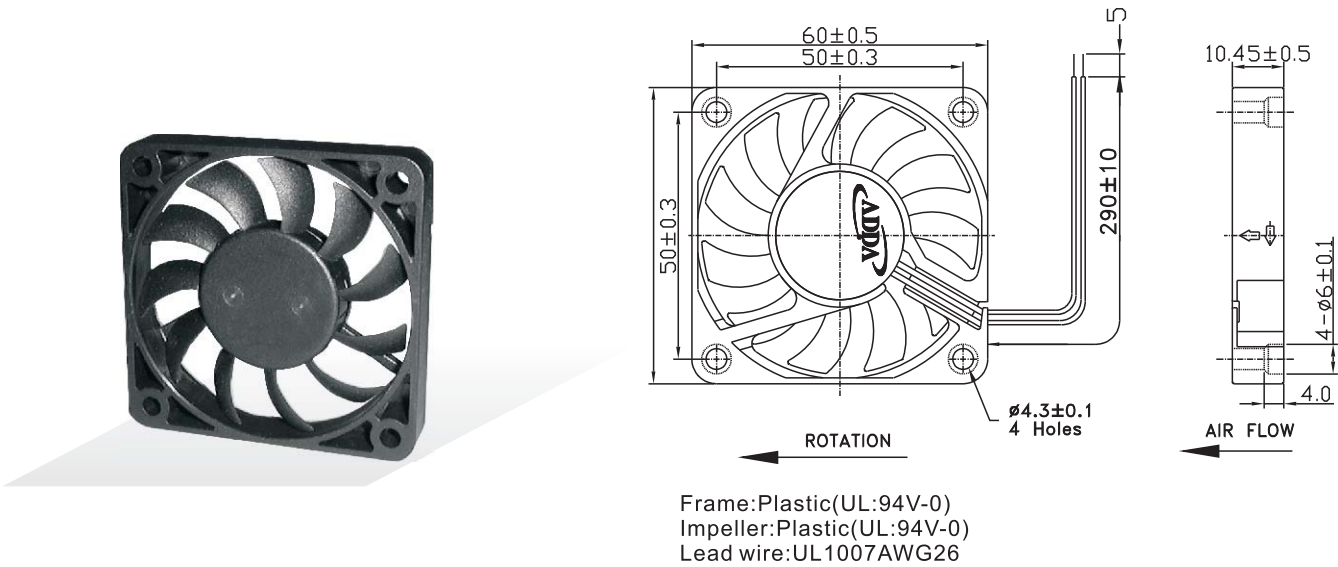

Specifications(Nominal)


*Noise is measured at the distance of one (1) meter from the axis of intake.

Bearing type: ◎=Ball※=Sleeve○=1B1S●=Hypro bearing

Frame size (mm)	Model No.	Bearing System Type	Rated Voltage (VDC)	Current (A)	Power (W)	Rated Speed (rpm)	Maximum AirFlow		Maximum Pressure		*Noise Level (dB/A)	Weight (g)
60x60x10	AD0605LB-GA0(GL)	◎※○●	5	0.26	1.30	3400	0.410	14.500	0.094	2.387	26.0	30.0
	AD0605MB-GA0(GL)	◎※○●	5	0.33	1.65	4000	0.489	17.300	0.127	3.225	31.7	
	AD0612LB-GA0(GL)	◎※○●	12	0.10	1.20	3400	0.410	14.500	0.094	2.387	26.0	
	AD0612MB-GA0(GL)	◎※○●	12	0.16	1.92	4000	0.489	17.300	0.127	3.225	31.7	
	AD0612HB-GA0(GL)	◎※○●	12	0.25	3.00	4600	0.594	21.000	0.165	4.191	35.8	

Specifications subject to change without notice.

The specification for bearing type is for reference only , for more bearing types information, please contact with your ADDA sales representative, thanks!!
(網頁上呈現產品軸承資訊均以2Ball為主，若需其他產品資訊請聯絡您在ADDA的業務代表，謝謝！！)

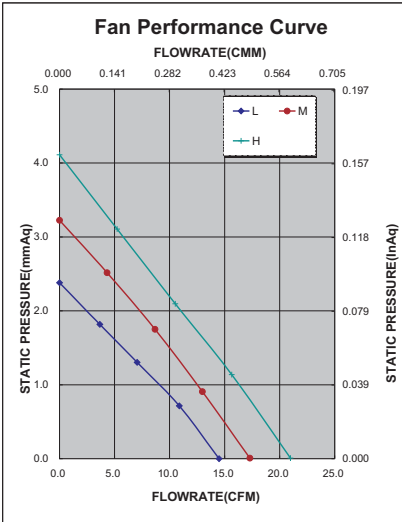

*Motor protective circuit and third lead wire functions

0	1	2	3	4	6	7	8	9	A	B
✓					✓					

*Safety approvals

✓	✓		✓	✓