


AD8020 SERIES

External Dimensions

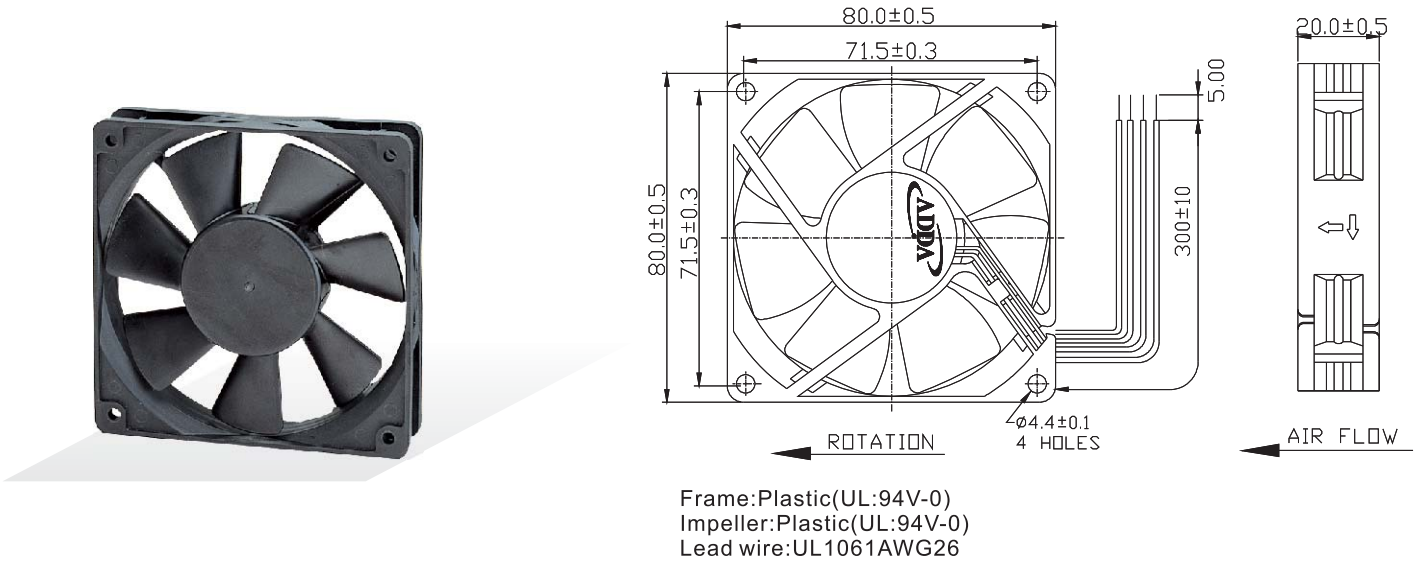


Specifications(Nominal)

*:Noise is measured at the distance of one (1) meter from the axis of intake.
Bearing type: ◎=Ball ※=Sleeve ○=1B1S ●=Hypro bearing

Frame size (mm)	Model No.	Bearing System Type	Rated Voltage (VDC)	Current (A)	Power (W)	Rated Speed (rpm)	Maximum AirFlow		Maximum Pressure		*Noise Level (dB/A)	Weight (g)
							(CMM)	(CFM)	(InAq)	(mmAq)		
80x80x20	AD0812LB-C7B	◎ ※ ●	12	0.09	1.08	2000	0.506	17.910	0.071	1.803	22.9	69.0
	AD0812MB-C7B	◎ ※ ●	12	0.12	1.44	2500	0.644	22.775	0.112	2.844	28.4	
	AD0812HB-C7B	◎ ※ ●	12	0.15	1.80	3000	0.792	28.000	0.150	3.810	33.0	
	AD0812UB-C7B	◎ ※ ●	12	0.20	2.40	3500	0.919	32.500	0.200	5.080	37.5	
	AD0812XB-C7B	◎ ※ ●	12	0.25	3.00	4000	1.051	37.172	0.258	6.553	41.0	
	AD0812VB-C7B	◎ ※ ●	12	0.32	3.84	4500	1.176	41.573	0.327	8.305	45.0	

Specifications subject to change without notice.

The specification for bearing type is for reference only , for more bearing types information, please contact with your ADDA sales representative, thanks!!
(網頁上呈現產品軸承資訊均以2Ball為主，若需其他產品資訊請聯絡您在ADDA的業務代表，謝謝！！)

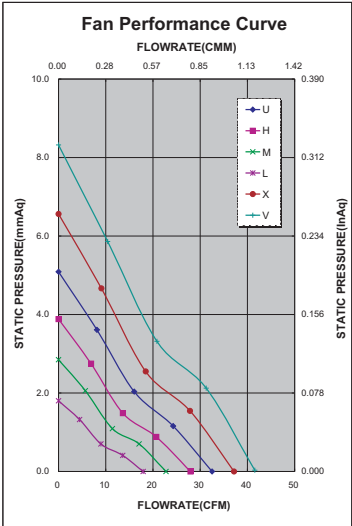

*Motor protective circuit and third lead wire functions

0	1	2	3	4	6	7	8	9	A	B
								✓		✓

*Safety approvals

				
✓	✓		✓	✓