




AD08020 SERIES

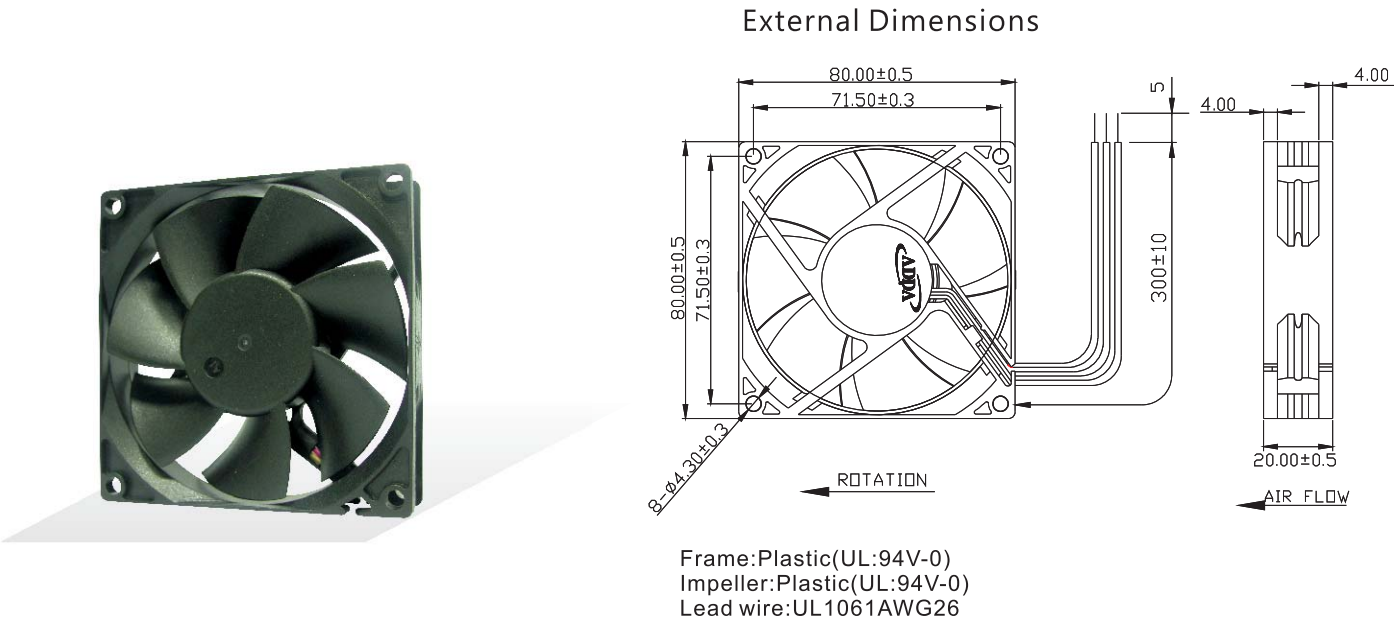

Specifications(Nominal)


*Noise is measured at the distance of one (1) meter from the axis of intake.

Bearing type: ◎=Ball※=Sleeve○=1B1S●=Hypro bearing

Frame size (mm)	Model No.	Bearing System Type	Rated Voltage (VDC)	Current (A)	Power (W)	Rated Speed (rpm)	Maximum AirFlow (CMM) (CFM)	Maximum Pressure (InAq) (mmAq)	*Noise Level (dB/A)	Weight (g)
80x80x20	AD08012MX207000	※ ●	12	0.08	0.96	2500	0.784 27.720	0.123 3.124	26.9	75.0
	AD08012HX207000	※ ●	12	0.12	1.44	3000	0.966 34.130	0.181 4.597	33.1	
	AD08012UX207000	※ ●	12	0.22	2.64	3600	1.151 40.700	0.256 6.502	38.3	

Specifications subject to change without notice.

The specification for bearing type is for reference only , for more bearing types information, please contact with your ADDA sales representative, thanks!!
(網頁上呈現產品軸承資訊均以2Ball為主，若需其他產品資訊請聯絡您在ADDA的業務代表，謝謝！！)

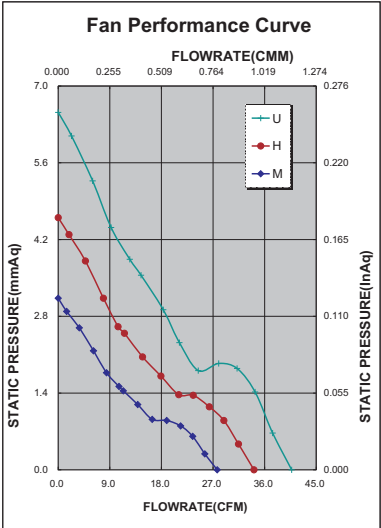

*Motor protective circuit and third lead wire functions

0	1	2	3	4	6	7	8	9	A	B
✓					✓					

*Safety approvals

				
✓	✓		✓	✓