


AS6038 SERIES

External Dimensions

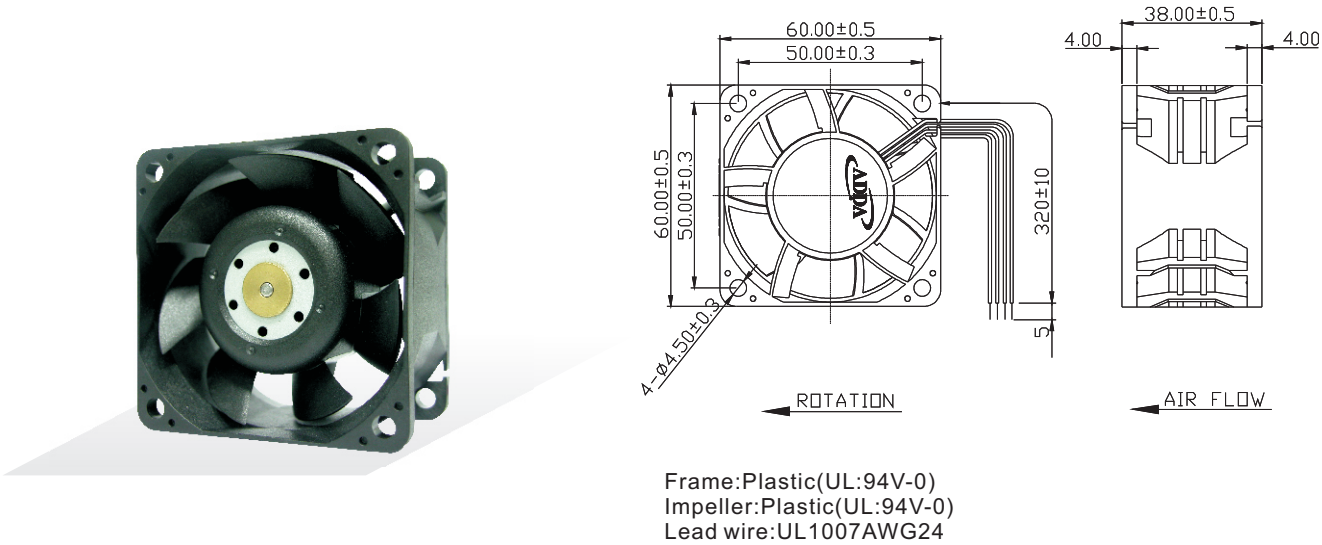


Specifications(Nominal)

Frame size (mm)	Model No.	Bearing System Type	Rated Voltage (VDC)	Current (A)	Power (W)	Rated Speed (rpm)	Maximum AirFlow		Maximum Pressure		*Noise Level (dB/A)	Weight (g)
							(CMM)	(CFM)	(InAq)	(mmAq)		
60x60x38	AS06012HB387300	◎	12	1.45	17.40	13000	1.934	68.370	1.954	49.650	61.4	125.0
	AS06012UB387300	◎	12	2.10	25.20	14500	2.155	76.180	2.415	61.360	64.1	
	AS06012XB387300	◎	12	2.70	32.40	16000	2.420	85.540	2.953	75.010	66.7	

Specifications subject to change without notice.

*:Noise is measured at the distance of one (1) meter from the axis of intake.

Bearing type: ◎=Ball ⋈=Sleeve ○=1B1S ●=Hypro bearing

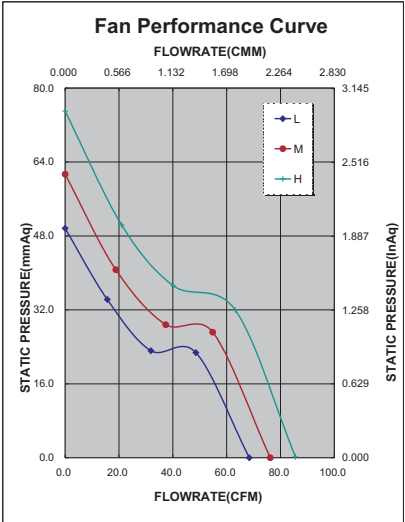

*Motor protective circuit and third lead wire functions

0	1	2	3	4	6	7	8	9	A	B
	✓	✓	✓					✓		✓

*Safety approvals

				
				✓